


GEN-200DH MPM 5/200 I-EL/H Portable

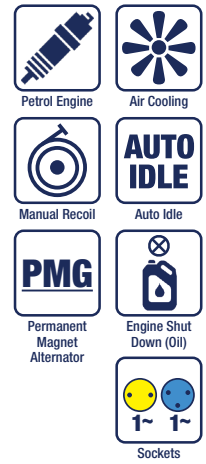

FEATURES

- Welding with cellulosic electrode
- Stepless current adjustment
- Arc Force Control switch
- Remote control socket
- Low oil level cut out device
- Earth leakage circuit breaker
- Power output protection
- 1 x 16A / 230V single-phase EEC socket
- 1 x 16A / 110V single-phase EEC socket
- Voltmeter

SPECIFICATIONS

Noise level	96 LWA
DC welding	Duty cycle @ 35%: 200A / 28V
	Duty cycle @ 40%: 200A / 22V
	Duty cycle @ 60%: 150A / 26V
	Stepless control (CC mode): 30A / 200A
	Open circuit voltage: 70V
	Max welding rod: 4mm
AC generator – 50Hz	Type: GenSet asynchronous, self-excited and self-protected
	Single-phase power 1.8kVA / 110V
	Single-phase power (max.): 3.6kVA – 230V
	Power factor: $\cos \varphi$ 0.8
Petrol engine – 3000 rpm	Type: Honda GX390 – 1 cylinder – 390 cm ³
	Max power: 11 HP (8.7 kWm)
	Starting system: Manual
	Cooling system: Air
	Fuel tank capacity: 6.1 litres
	Fuel consumption @ 75%: 3.3 l/h
Insulation class	H
Ambient temperature	40°C
Altitude	1000m
Mechanical protection	IP23
Dimensions (L x W x H)	720 x 480 x 515mm
Dry weight	96 kg

OPTIONAL ACCESSORIES – See page 14

GEN-003 Wheelbarrow Type Trolley