

ERGO CUT S 65



CE EN60974-7



CODE	↔		
PAS406M-000-BA3	6 m	19.7'	1/4 GAS
PAS406M-004-BA3	6 m	19.7'	CENTRAL 004
PAS406M-304-BA3	6 m	19.7'	TRAFIMECTOR® 304

TECHNICAL DATA		
NO HF	ERGO CUT S 65	
1m	0,4 kg	0.88 lb
V PEAK	500	
4 bar	4 bar	
100 l/min	100 l/min	
X 60%	60A	
16-20 mm	16-20 mm	5/8" - 25/32"

For Central 004 and Trafimector 304 pin connection scheme see page 114

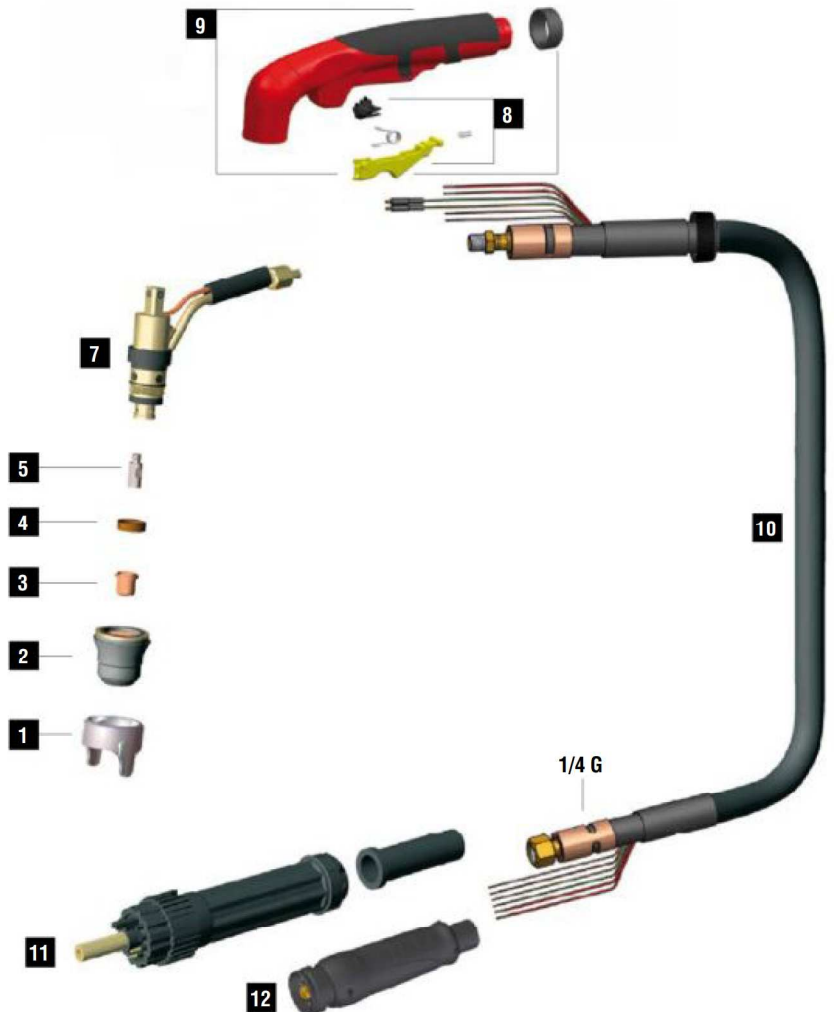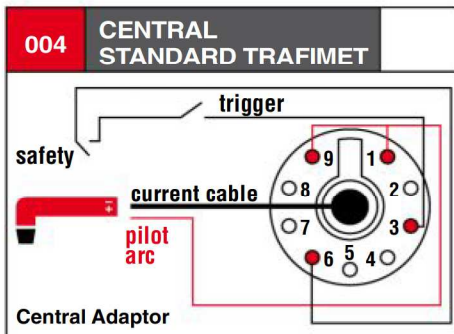

	CODE		Description	Ø	↔	CONTACT		DRAG		GOUGING	REF	
1	CV0299		gouging shield		20,8 mm							2
1	CV1118		stand off guide		25,5 mm							2
2	PC0098		nozzle		29 mm							2
2	PC0198		long life nozzle		29 mm							2
3	PD0098-08		40 A	0,8 mm	.030"	17,7 mm						10
3	PD0098-10		60 A	1,0 mm	.040"	17,7 mm						10
3	PD0199-16		gouging tip	1,6 mm	.063"	17,7 mm					-	10
4	PE0106		Swirl ring		4,6 mm						60028	2
5	PR0098		electrode		24,8 mm							10

	CODE		Description	
7	EA0330		o-ring	10
7	PF0128		Ergocut S 65 torch head	1
8	TP0400		trigger kit	1
9	TP0401		handle kit	1
10	PH4027		coaxial cable - 6 m / 19.7' - 1/4 G (no pin)	1
11	BW0073		cable support	10

	CODE		Description	
11	BW0147		cable support	10
11	FY0023		plasma central adaptor - 5 pins	1
12	FY0090		TRAFIMECTOR® central adaptor - torch side	1
	EA0254		pin extractor for central adaptor	1
	PT0202		male spring pins kit (5 pcs)	1

STANDARD

CONTACT SHORT CONTACT LONG DRAG SHORT DRAG LONG GOUGING