



# ELECTRODE OVENS

PORTABLE WELDING ELECTRODE OVENS



MAINTAINS  
ELECTRODE QUALITY



ROBUST AND  
PORTABLE DESIGN



RANGE OF  
CAPACITIES

# ELECTRODE OVENS

## TECHNICAL SPECIFICATIONS

### MWQ-6F


6KG CAPACITY

- ▶ Integrated carrying handle for easy transportation
- ▶ Consistant electrode conditioning to help maintain welding performance
- ▶ Helps protect electrodes from moisture absorption



The Masterweld MWQ-6F electrode oven maintains a fixed temperature of 110°C, helping keep welding electrodes dry and ready for use. Its compact, portable design makes it ideal for workshop and site applications.

| SPECIFICATIONS                |                                 |
|-------------------------------|---------------------------------|
| Model                         | MWQ-6F                          |
| Electrode Capacity            | 6kg                             |
| Temperature                   | 110°C (fixed)                   |
| Output                        | 0.15 kW                         |
| Supply                        | 24VAC, 48/85VDC, 110VAC, 240VAC |
| Weight                        | 3 kg                            |
| Dimensions (HxWxD) - Exterior | 530 x 140x135mm                 |
| Dimensions (HxWxD) - Interior | 430 x 73 x 73mm                 |
| Calibration                   | No                              |

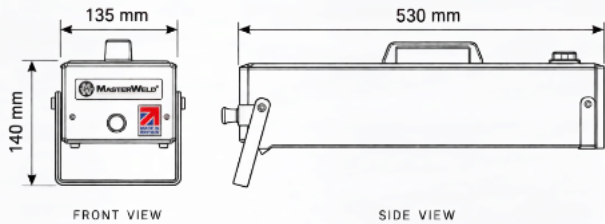

### MWQ-7


7KG CAPACITY

The Masterweld MWQ-7 electrode oven helps keep welding electrodes dry and in optimum condition. Its robust construction and compact upright design make it a practical, portable solution for workshop and on-site applications.

- ▶ Precise temperature control for different electrode requirements
- ▶ Robust and Portable design ideal for both workshop and site use
- ▶ Easy-access electrode opening for convenient use



| SPECIFICATIONS                |                                 |
|-------------------------------|---------------------------------|
| Model                         | MWQ-7                           |
| Electrode Capacity            | 7kg                             |
| Temperature                   | 50-200°C                        |
| Output                        | 0.3 kW                          |
| Supply                        | 24VAC, 48/85VDC, 110VAC, 240VAC |
| Weight                        | 5.5 kg                          |
| Dimensions (HxWxD) - Exterior | 630 x 200 x 165mm               |
| Dimensions (HxWxD) - Interior | 473 x 93 x 73mm                 |
| Calibration                   | Optional                        |

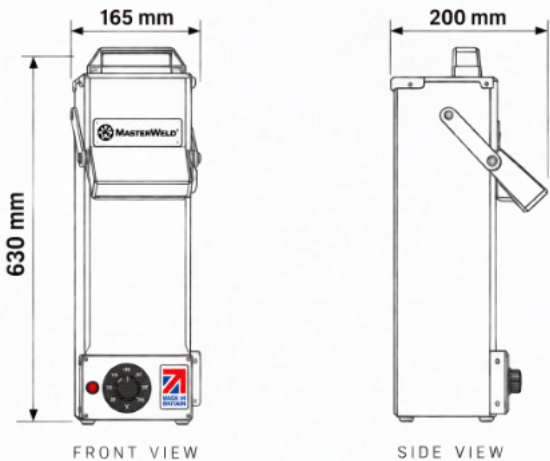

# MWQ-11

## 6KG CAPACITY


The Masterweld MWQ-11 electrode oven helps keep welding electrodes dry and in optimum condition, reducing the risk of moisture-related welding defects. Its generous capacity makes it a practical choice for regular workshop and site use.

- ▶ Adjustable temperature control  
From 50°C to 200°C
- ▶ Easy Access electrode opening  
For convenient loading and removal
- ▶ Integrated carrying handle  
For easy transportation



### SPECIFICATIONS

|                               |                                 |
|-------------------------------|---------------------------------|
| Model                         | MWQ-11                          |
| Electrode Capacity            | 11kg                            |
| Temperature                   | 50-200°C                        |
| Output                        | 0.3 kW                          |
| Supply                        | 24VAC, 48/85VDC, 110VAC, 240VAC |
| Weight                        | 7.5 kg                          |
| Dimensions (HxWxD) - Exterior | 630 x 243 x 206mm               |
| Dimensions (HxWxD) - Interior | 460 x 130 x 110mm               |
| Calibration                   | Optional                        |

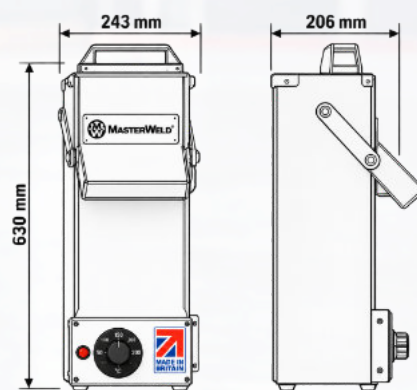

# MWQ-15H

## 6KG CAPACITY


- ▶ Extended temperature range
- ▶ Easy-access front opening for convenient loading and removal
- ▶ Integrated carrying handle for easy transportation



The Masterweld MWQ-15H electrode oven helps keep welding electrodes dry and in optimum condition, reducing the risk of moisture-related welding defects. Its high-capacity design makes it ideal for demanding workshop and industrial applications.

### SPECIFICATIONS

|                               |                         |
|-------------------------------|-------------------------|
| Model                         | MWQ-15H                 |
| Electrode Capacity            | 15kg                    |
| Temperature                   | 50-320°C                |
| Output                        | 0.3 kW                  |
| Supply                        | Dual Voltage 110/240VAC |
| Weight                        | 7.5 kg                  |
| Dimensions (HxWxD) - Exterior | 610 x 260 x 175mm       |
| Dimensions (HxWxD) - Interior | 460 x 115 x 121mm       |
| Calibration                   | Optional                |

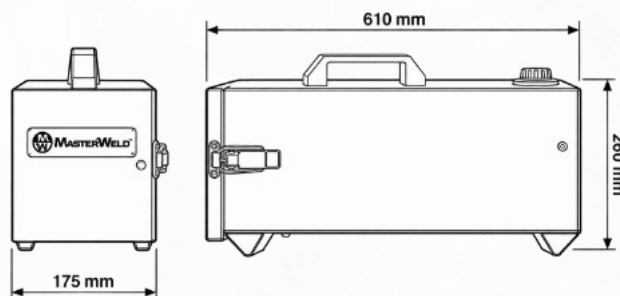



# GLOBAL SUPPLY

FROM THE UK TO CUSTOMERS WORLDWIDE



BRITISH MANUFACTURING. GLOBAL DISTRIBUTION. SINCE 1994



**EXPLORE THE  
RANGE**

Scan to view



AES Group,  
Olympic House, Collett, Southmead Park,  
Didcot, OX11 7WB



Certificate No. 13319

Masterweld® is a registered trademark of AES Manufacturing and Distribution Ltd t/a AES Group