


# MG 3000 I-HE 3,1 LT



Honda GX 160 Engine

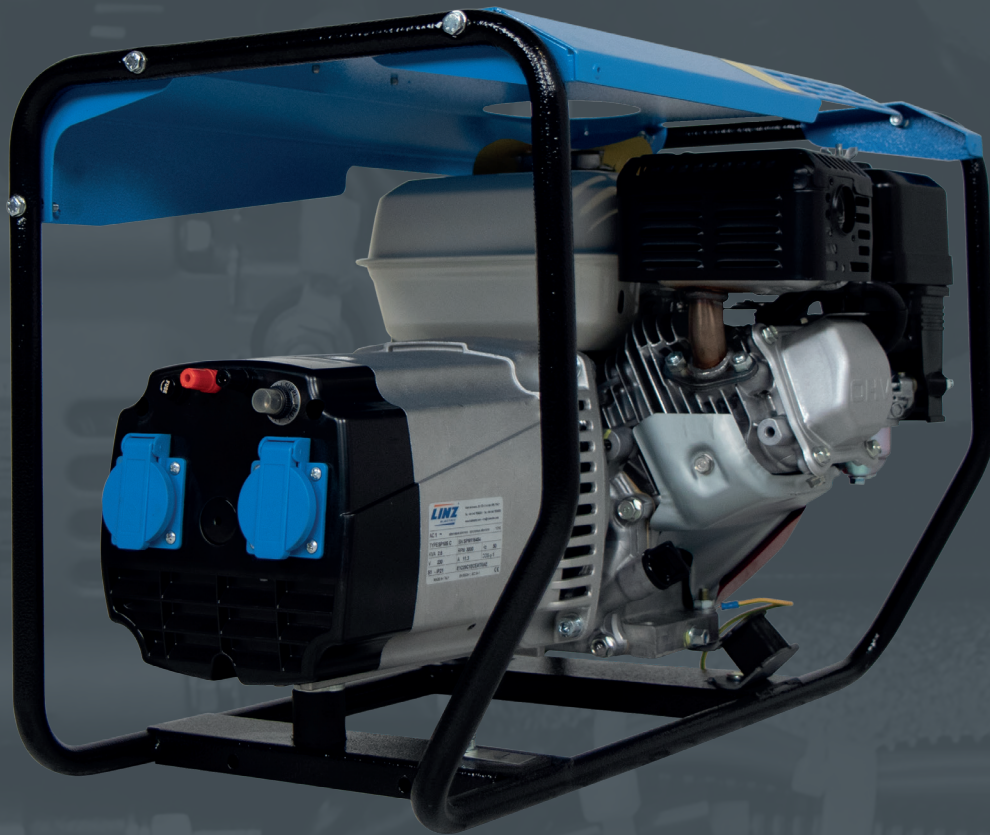

Frontal panel



3,1 Lt Fuel Tank



Stage V

We offer now what others will do tomorrow.



**GenSet s.p.a.**

Via Stazione 5 - 27030  
Villanova d'Ardenghi (PV) - Italy  
Phone: +39-0382-5091

commerciale@genset.it  
www.genset.it

 **GenSet**  
Next Gen technology  
for top business.

**PORTABLE SINGLE-PHASE POWER GENERATOR**  
**OUTPUT POWER 3 kVA**  
**PETROL ENGINE 3000 RPM**  
**FUEL TANK 3,1 LT**

Standard Features	<ul style="list-style-type: none"> <li>• Low oil level shutdown device</li> <li>• 2 x 230 V - 50 Hz single-phase Schuko socket protected by circuit breaker</li> <li>• 12Vdc battery charger outlet protected by fuse</li> </ul>
Noise level	<ul style="list-style-type: none"> <li>• Lwa 95 (70 dB a 7 mt)</li> </ul>
AC generator - 50Hz	<ul style="list-style-type: none"> <li>• Type: synchronous</li> <li>• Single-phase power (max.): 3 kVA - 230 V</li> <li>• Battery charger power: 120 W - 12 V - 10 A - DC</li> <li>• Power Factor: <math>\cos \phi</math> 0,8</li> </ul>
Petrol Engine 3000 rpm	<ul style="list-style-type: none"> <li>• Type: Honda GX 160 OHV - STAGEV - 1 cyl. 4,3 HP (3,2 kWm) 163 cm<sup>3</sup></li> <li>• Cooling system: air</li> <li>• Starting system: recoil</li> <li>• Fuel tank capacity: 3,1 lt</li> <li>• Fuel consumption @ 75%: 1,4 lt/h</li> </ul>
Other features	<ul style="list-style-type: none"> <li>• Insulation Class: H</li> <li>• Ambient temperature: 40 °C (*)</li> <li>• Altitude: 1000 mt (*)</li> <li>• Mechanical Protection: IP 23</li> <li>• Dimensions (L x W x H): 610 x 360 x 410 mm</li> <li>• Dry weight: 36 kg</li> </ul>